

STEINWAY LYNGDORF



## Steinway & Sons P200

*The Steinway & Sons P200 is equipped with the advanced technologies for which Steinway Lyngdorf is known, including RoomPerfect™ and fully digital signal processing. The P200 also delivers 4K and 3D video support, HDCP 2.2, and advanced HDMI switching. It is the most high-def surround sound experiences that the world has ever heard.*

### DIGITAL FOR THE PUREST SOUND

All Steinway Lyngdorf systems are 100% digital without sound-deteriorating digital-to-analog conversions anywhere in the audio chain. This means our fully digital processors and amplifiers ensure sound is replayed completely intact, delivering the purest sound possible.

Fully digital processing, in combination with the Steinway Lyngdorf Digital Link (a link cable that will carry an encrypted signal communicating both the initial setup as well as the digital audio signal and control data) keeps the audio stream entirely in the digital domain, while maintaining full resolution of the original signal. This means nothing gets between you and your sound.

### HANDLES MULTIPLE SPEAKER SETUPS



The P200 offers full support of every audio format on the market, including immersive surround sound such as Dolby Atmos®, DTS:X, and AURO-3D®. And there's no need to pick sides. At the touch of a button, you can switch between speakers placed at the positions recommended for any specific format, or have your speakers be optimized for one and let the P200 intelligently optimize the audio for the other formats.

### HIGH EFFICIENCY IN EVERY ASPECT

The P200 can only be used with amplifiers and speakers from Steinway Lyngdorf. We guarantee the legacy of absolute perfection that comes with the Steinway & Sons partnership, and this cannot be attained with a mix of “off the shelf” products from different manufacturers. No chain is stronger than the weakest link, and our full system approach ensures high efficiency in every aspect.

### THE PERFECT SOUND WITH ROOMPERFECT™

The P200 is equipped with our proprietary RoomPerfect™ room-correction software, the world's most sophisticated technology for adapting the sound system to the environment. With RoomPerfect™, P200 delivers a perfect surround sound experience without the need for extensive room treatment.

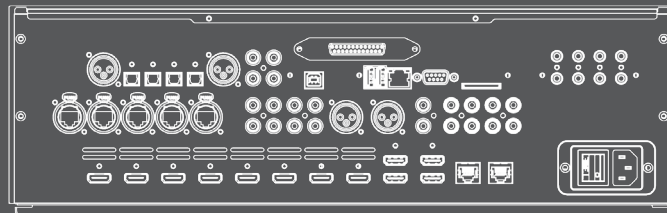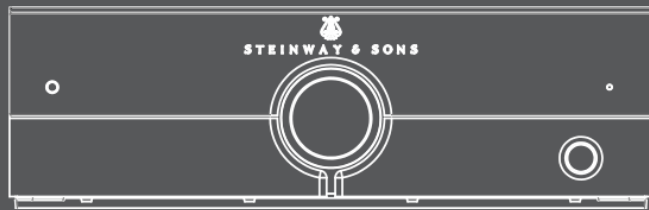

## SPECIFICATIONS

<b>Description:</b>	Rack mount or freestanding surround sound processor
<b>Key features:</b>	RoomPerfect™, capable of handling up to 256 output channels, HDCP 2.2, 4K resolution, 3D video
<b>Decoding:</b>	Dolby® Atmos, Dolby Digital, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, DTS, DTS ES Discrete 6.1, DTS ES Matrix 6.1, DTS 96/24, DTS-HD High Resolution Audio, DTS-HD Master Audio, AURO-3D®
<b>Post processing:</b>	Dolby Surround, AURO-MATIC®, DTS Neural:x, DTS NEO:X
<b>Inputs:</b>	Audio: 1 x AES/EBU S/P-DIF input, 3 x S/P-DIF coaxial inputs, 4 x S/P-DIF optical inputs, 1 x USB audio input (≤192kHz/32bit), 1 x balanced stereo analog input (XLR), 4 x single ended stereo analog inputs (RCA), 1 x multichannel single ended analog input (RCA), 1 x microphone input (XLR) Video: 8 x HDMI™
<b>Outputs:</b>	Audio: 5 x Steinway Lyngdorf Digital Links (CAT 5e based), 1 x single ended stereo analog output for secondary audio output, 1 x SPDIF coax digital output, 5 x HDMI™ – Video: 4 x HDMI™ – ARC compatible, use 4 screens as one coherent display, show 4 inputs on one HDMI output, picture in picture, 1 x HDBaseT connector – show 4 inputs on one output, picture in picture
<b>Miscellaneous:</b>	1 x DB9 RS232 connector, 2 x IR sensor inputs, 1 x IR output (loop from one of the sensor inputs), 1 x Trigger input, 4 x Trigger outputs, 1 x RJ45 Ethernet LAN connector, 2 x USB connectors, 1 x SD card slot (Storage for system software)
<b>Interface options:</b>	RS232, IP, Web Interface, ihiji, Remote Control App on iOS and Android platforms
<b>Mediayer:</b>	Internet radio (vTuner), Spotify connect, DLNA Support of FAT32 based media storage, Airplay, Roon Ready
<b>Control interfaces:</b>	1 x DB9 RS232 connector, 2 x IR sensor inputs, 1 x IR output (loop from one of the sensor inputs), 1 x trigger input, 4 x trigger outputs, 1 x RJ45 ethernet LAN connector, 2 x USB connectors, 1 x SD card slot (Backup - storage for system software and settings)
<b>Placement options:</b>	Rack mount or freestanding
<b>Dimensions (W x H x D):</b>	445 x 14 x 35.9 cm / 17.7 x 5.51 x 14.1 in
<b>Weight:</b>	6.6 kg / 14.6 lb
<b>Finish:</b>	Black
<b>Item no.:</b>	90010001x
<b>Country of origin:</b>	Denmark